



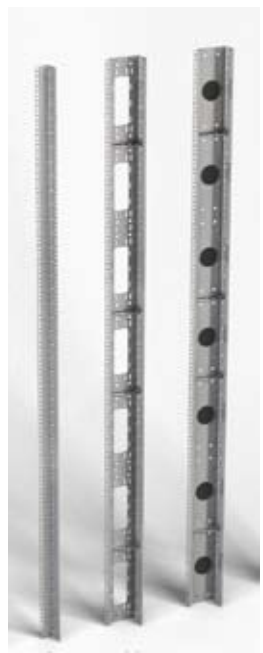

Basic right extrusion types

Top View



19" extrusions - L, H, C(from the left)



DESCRIPTION OF EXTRUSIONS

Type	Description
C	C-type extrusions gives the same load rating as high-load extrusions. C-type extrusions are required when using an air separation frame in an 800mm wide rack. All openings, except mounting positions, are covered by blanking panels. C-type extrusions are installed as standard into 800mm wide racks in the rack design presented above.
H	High load extrusion with oval holes. Can be used with HDWM-VMR and HDWM-ACT troughs.
L	L-profile extrusions guarantee maximum compatibility with server mounting kits so the installation becomes even easier. L-profile extrusions are installed as standard into 600 and 800mm wide racks in the rack design presented above. For 800mm width rack is used support console.

19" extrusions for rack series