



CONTEG DATA SHEET

version: 03-09-2010

RSG2 SERIES 19" OPEN FRAMES

CONTEG, spol. s r.o.

Headquarters Czech Republic:
Na Vítězné pláni 1719/4
140 00 Prague 4

Tel.: +420 261 219 182
Fax: +420 261 219 192
conteg@conteg.com
www.conteg.com

Local Offices:

Austria:	+43 699 1819 7071
Benelux:	+32 477 957 126
Eastern Europe:	+49 172 848 4346
France:	+33 686 074 386
Germany:	+49 170 523 4958
Russia:	+7 495 506 1328



RSG2 high-load two post open frames are designed to be used together with High Density Wire Managers. RSG2 open frames bring unbeatable accessibility. The RSG2 two post frames are available with two load ratings, depending on the type of equipment that you want to install. The 500kg rated frame is ideally suited to high density cabling applications, whereas the 1000kg rated frame is suited to the installation of heavier equipment. The frames are also suitable for use in testing and service rooms where they ensure unlimited access to components installed.

RSG2 series 19" open frames

COLOR SAMPLER:

RAL 9005

DESCRIPTION

Sizes

- Height: 27, 42, 45, 47U
- Width: 550mm
- Depth: 100mm

Construction

- 2.0mm sheet steel

Load rating

- 500kg (balanced load; all heights)
- 1000kg (balanced load; only 42, 45, 47U)

IP rating

- IP00 (no protection)

Color

- Standard RAL 9005

Base



- Produced from sheet steel
- Base comprises holes for anchoring screws

Standard equipment




- 1 pair of 19" vertical extrusions with U marking
- Top angles
- 2x base



RSG2-42-19-L5

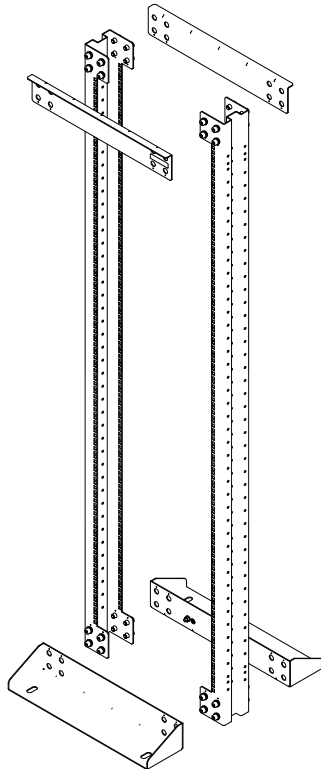

Top view

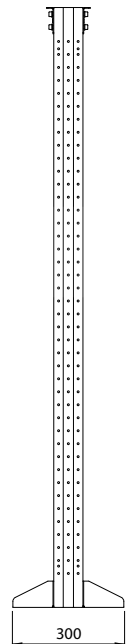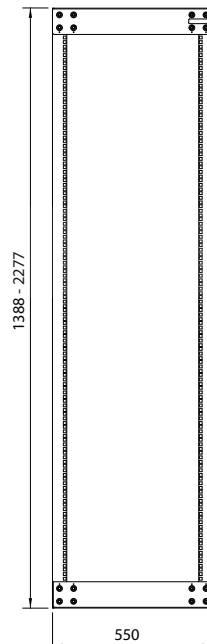

Code	H in Units	H in mm	Load rating in kg
RSG2-27-19-L5	27	1388	500
RSG2-42-19-L5	42	2055	500
RSG2-45-19-L5	45	2188	500
RSG2-47-19-L5	47	2277	500
RSG2-42-19-LA	42	2055	1000
RSG2-45-19-LA	45	2188	1000
RSG2-47-19-LA	47	2277	1000

Note: All dimensions in mm