



CONTEG DATA SHEET

version: 24-09-2010

COMPLEMENTARY SYSTEMS

KEYBOARD-VIDEO-MOUSE SOLUTIONS (KVM/LCD)

CONTEG, spol. s r.o.

Headquarters Czech Republic:
Na Vítězné pláni 1719/4
140 00 Prague 4

Tel.: +420 261 219 182
Fax: +420 261 219 192
conteg@conteg.com
www.conteg.com

Local Offices:

Austria:	+43 699 1819 7071
Benelux:	+32 477 957 126
Eastern Europe:	+49 172 848 4346
France:	+33 686 074 386
Germany:	+49 170 523 4958
Russia:	+7 495 506 1328



KVM consoles

CONTEG KVM consoles are designed for deployment in server rooms or data centers. The consoles allow direct or remote access to individual servers or their cascades. Using the CONTEG console, you will be able to configure and administer servers of all the main manufacturers (IBM, HP, DELL, SUN and others). The CONTEG KVM console is an integrated design whereby the KVM switch and LCD console, including a keyboard and touchpad are housed within a compact 1U height unit.


Two types of KVM: DB-15 - direct cable
CAT-5 - dongle via TP cables



K-LKD151(171)

LCD holders

LCD holders include high-quality SAMSUNG monitors with a 15", 17" and 19" diagonal. The design of the holder allows the screen to be folded when not in use so that the total height of the console with the LCD monitor does not exceed 1U. The holder includes extrusions designed for easy assembly and for drawing out the KVM/LCD console. A significant advantage of the CONTEG KVM/LCD holders is that they are equipped with a full keyboard (including numerical) with 104 keys and optional language localization, including the touchpad.

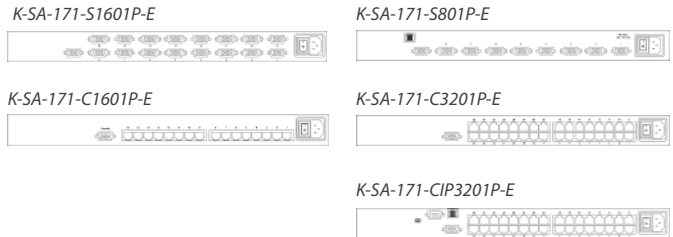

DESCRIPTION

- PS/2 or USB input into the LCD holder (according to the cabling terminal type)
- Optional language setting of the keyboard (USA, GBR, JPN, DEU, FRA, ITA, RUS, ESP, CHN, KOR, DNK, CHE, NOR and European localization of keyboard)
- Keyboards is equipped with a touchpad (with a trackball optionally)
- Multilingual "on screen" menu
- Sliding bars with a position fixation to prevent movement during typing
- Easy connection of KVM console
- Standard power supply 230V; 12, 24 and 48V optionally

LCD DRAWERS ONLY										
Code	H in U	LCD size	Dimensions in mm			Dimensions including packing in mm			Weight in kg	
			W	D	H	W	D	H	Nett	Gross
K-SA-171	1	17"	442	650	44	589	856	168	16	22
K-SA-191	1	19"	442	650	44	589	856	168	17	23
K-LKD-151	1	15"	442	650	44	589	856	168	15	21
K-LKD-171	1	17"	442	650	44	589	856	168	15	21

KVM SETS - LCD DRAWER & KVM SWITCH			
Code ³	No and type of port	Access over IP	Description
K-SA-171-S801P-E	8x USB ¹	No	up to 128 servers by 8-level cascade
K-SA-171-S1601P-E	16x USB ¹	No	up to 128 servers by 8-level cascade
K-SA-171-C1601P-E	16x Cat5 ²	No	up to 256 servers by 8-level cascade
K-SA-171-C3201P-E	32x Cat5 ²	No	up to 256 servers by 8-level cascade
K-SA-171-CIP3201P-E	32x Cat5 ²	Yes	up to 256 servers by 8-level cascade

¹ includes 8 KVM cables (additional cables to be ordered separately)

² USB, PS/2 dongles or Cat5 cords required for use with this switch (to be ordered separately)

³ KVM set contains LCD type K-SA-171; this can be replaced by any other LCD solution from table LCD DRAWERS ONLY

LCD holders can be combined with individual KVM consoles from the CONTEG offer. In case you do not find the LCD holder or KVM console you are looking for, do not hesitate to contact us. Many special consoles and holders are not included in the standard offer.

All LCD drawers include European layout keyboard. All other layouts on the request.