


IT Cabinet Configuration

RF1-42-80/10A-WFWA-0HK-B

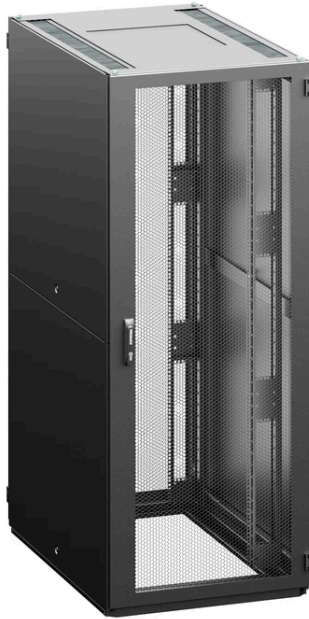

Configuration Parameters

Height	42	42U (2005 mm)
Width	80	800 mm
Depth	10	1000 mm
Color	B	RAL 7035 (light gray)
Bar type	A	A - type of extrusions
Front door	W	perforated door, perforation rate 86%
Front door lock	W	swivel handle, DIN profile, universal key 333, multipoint
Rear Door	F	perforated door vertically divided, perforation rate 86%
Rear Door Lock	W	swivel handle, DIN profile, universal key 333, multipoint

Side panel

A 2 side panels, sheet steel, universal key

Top and bottom plate

H Standard: Top plate - H design, bottom plate -segmented, only first segment)

General Accessories

No general accessories.

Installed Accessories

Žádné příslušenství s přiřazenou pozicí.

Vygenerováno: 30.06.2026 17:49