



 DATASHEET

iSEVEN FLEX RQN

Wall-mounted & SOHO racks

CONTEG, spol. s r.o.

Stetkova 1638/18, 140 00 Prague 4, Czech Republic

Tel.: +420 565 300 358, info@conteg.com


www.conteg.com

WALL-MOUNTED & SOHO RACKS

iSEVEN FLEX RQN



RQN-U-15-60/60

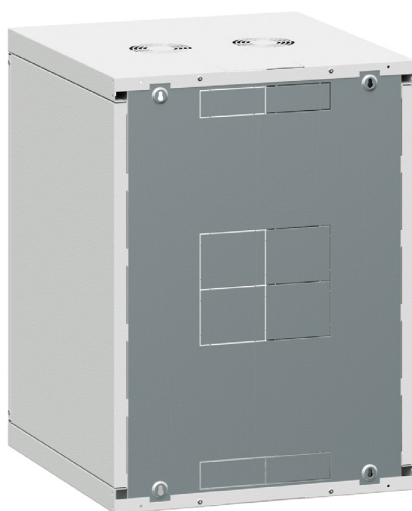


Wall-mounted **iSEVEN Flex RQN** racks are ready for daily use, with an unmatched ratio between price, utility value and quality.

MAIN ADVANTAGES

- Unmounted version for easy shipping and storage
- Simple and quick assembly
- Unobstructed access to installed equipment from front and sides
- Load rating up to 50 kg

COLOR:  RAL 9005  RAL 7035

Code	H (in U)	Dimensions of the racks after assembly (mm)				Package dimensions (mm)			Gross weight (kg)
		H	W	D	Useful depth	H	W	D	
RQN-U-06-60/45	6	374	572	450	405	150	590	455	13,5
RQN-U-09-60/45	9	507	572	450	405	220	590	540	16
RQN-U-12-60/45	12	640	572	450	405	220	590	670	19
RQN-U-15-60/45	15	773	572	450	405	220	590	805	21,5
RQN-U-18-60/45	18	907	572	450	405	220	590	940	24
RQN-U-21-60/45	21	1040	572	450	405	220	590	1070	27
RQN-U-12-60/60	12	640	572	600	505	220	590	670	23
RQN-U-15-60/60	15	773	572	600	505	220	590	805	25
RQN-U-18-60/60	18	907	572	600	505	220	590	940	29
RQN-U-21-60/60	21	1040	572	600	505	220	590	1070	32

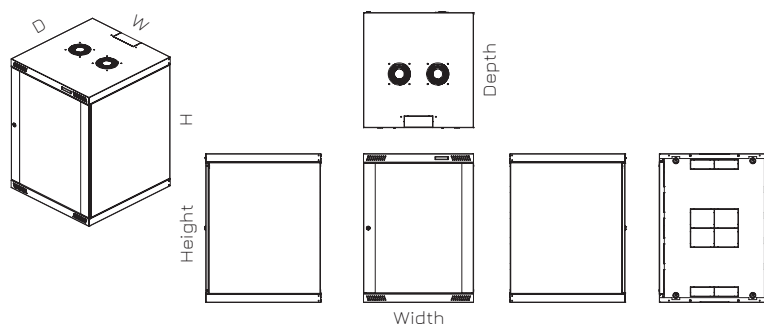

DESCRIPTION

Sizes

- Height: 6, 9, 12, 15, 18, 21U
- Width: 572 mm
- Depth: 450 mm, 600 mm (12U+)

Construction

- 0.8mm/1.5mm sheet steel
- Delivered unassembled; assembly at installation site
- Quick and easy assembly

Load rating

- Standard 50 kg balanced load

IP rating

- Standard IP20

Colors

- Standard: RAL 7035, RAL 9005
- Other colors on request

Front door

- Security-glass (EN 12150-1) or sheet steel door
- Reversible door—easy re-hanging to open right or left (at installation site)
- Door opening angle 180°

Ventilations

- 2× top cover perforation
- 2× bottom cover perforation

Cable entries

- Top and bottom openings for cable entry, size 150 × 56 mm, knock out opening
- Can be covered by sliding blank panel with butterfly nuts (DP-DB-200×68) or brush cable entry (DP-KP-KAR3)—ordered separately
- Cable entries on the rear edge of enclosure for straight cable path alongside the wall

Rear panel

- Easy wall installation
- Cable entry for wall through cables
- Integrated additional 19" extrusions for fixing

STANDARD CONFIGURATION:

- 1 pair sliding 19" vertical extrusions
- 2 removable side panels with lock
- Tinted security-glass door (EN 12150-1) with lock
- GND/earthing kit